



ingenico

# Link/2500

Smart, sleek, simple.

Payment excellence at its finest



- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Google Pay
- Optimize your payment solution for any existing infrastructure thanks to a fully versatile connectivity options
- The ideal payment terminal for mobility use cases



With the Link/2500, Ingenico brings payment acceptance solution to any mobile solution.



### Highest security

The Link/2500 is PCI-PTS 5.x certified. Its Telium Tetra OS uses the latest cryptographic schemes with future-proof key length.

### User-friendly and intuitive interface

Featuring a sleek design, Link/2500 is versatile and intuitive thanks to a bright 2.4" color display and a USB-C connector.

### Payment options

In addition to EMV Chip & Pin, Link/2500 supports the broadest range of contactless standards allowing NFC couponing and wallet use cases.

### Secure Telium TETRA OS

Backed by 40 years of experience and with its user-friendly interface, the Telium TETRA operating system includes the best security mechanisms embedded to protect transaction privacy and leverages Ingenico's unique portfolio of payment applications.

### Designed for accessibility


Thanks to an integrated speaker which could provide vocal assistance and a real mechanical keypad with raised marking, Link/2500 is built for the most demanding use.

### Compatible with Ingenico's suite of services

Keeping the solutions connected, the Link/2500 works in unison with Ingenico's supporting service platforms, meaning merchants will have access to business services such as estate management reporting. Software updates and day-to-day support deliver a hassle-free experience.

### Designed for mobility

Featuring a pocket-sized, light weight and robust design the Link/2500 is the perfect business acceptance point for mobile solutions.

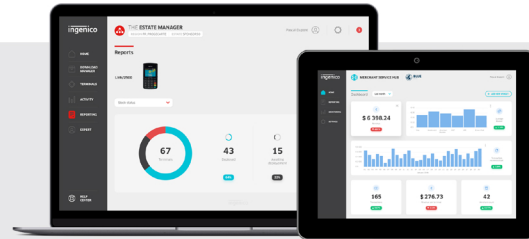

The Link/2500 is supported by our Cloud Services

|                      |  |   | LINK/<br>2500<br>Standard |
|----------------------|--|---|---------------------------|
| Processor            | • Application & Crypto processor             | • Cortex A5   | ✓                         |
| Memory               | • Internal                                   | • 256 MB Flash, 128 MB RAM  | ✓                         |
| OS                   |  | • Telium TETRA  | ✓                         |
| SIM / SAM            |  | • Up to 2   | Optional                  |
| Card Readers         | • Magstripe<br>• Smart card<br>• Contactless | • ISO 1/2/3, 500K lifespan<br>• EMV Level 1, 50K lifespan<br>• EMV / ISO14443 | ✓<br>✓<br>✓               |
| Display              | • Color                                      | • 2.4" color display, backlit, QVGA (240x320 pixels)                          | ✓                         |
| Keypad               | • Mechanical                                 | • 20 keys, raised marking   | ✓                         |
| Audio                | • Buzzer<br>• Speaker                        |   | ✓<br>✓                    |
| Terminal Connections | • USB Type C                                 | • Host and Device (Both)<br>• USB power/data & serial docking pads (2500i)    | ✓<br>N/A                  |

|                       |  |  | LINK/<br>2500<br>Standard |
|-----------------------|--|--|---------------------------|
| Terminal Connectivity | • LAN<br>• Apple IAP2 Chip   | • Bluetooth class II<br>• WIFI (Dual band)   | ✓<br>✓<br>✓               |
| Terminal Size         | • L x W x H  | • 5.07 x 2.75 x 0.67" (129 x 70 x 17 mm)<br>• 5.07 x 2.75 x 0.59" (129 x 70 x 15 mm)   | ✓<br>N/A                  |
| Power Supply          | • Terminal   | • 5V 1A  | Optional                  |
| Battery               | • Li-ion   |  | 1200mAh (removable)       |
| Weight                | • Full featured  |  | 5.46 oz (155g)            |
| Environment           | • Charging Temperature<br>• Operating Temperature<br>• Storage Temperature<br>• Operating Humidity | • 32°F to 104°F (0°C to +40°C)<br>• -14°F to 122°F (-10°C to +50°C)<br>• -4°F to 131°F (-20°C to +55°C)<br>• 85% non-condensing at 104°F (+40°C) | ✓<br>✓<br>✓<br>✓          |
| Accessories           | • Cable<br>• iCON Case   | • USB A to USB C: 1.5m   | ✓<br>Bluetooth            |
| Security              |  | • PCI PTS v5.x online & offline certified  | ✓                         |